

### Introduction

#### (General Description)

The EC9509C / 08C Series is a high-precision voltage detector developed using CMOS process. The detection voltage is fixed internally with an accuracy of  $\pm 2.0\%$ . A time delayed reset can be accomplished with the addition of an external capacitor. Two output forms, N-channel open-drain and CMOS output, are available.

#### Features

- Ultra-low current consumption  
     1.0 mA typ. (VDD=2.0 V)  
     1.1 mA typ. (VDD=3.5 V)
- High-precision detection voltage  $\pm 2.0\%$
- COperating voltage range 2.0 V to 6.0 V
- Detection voltage 2.2 V to 3.1 V (0.1 V step)
- Hysteresis characteristics 5 % typ.
- Two output forms: CMOS  
     output active "L" Open-drain  
     output active "L"

#### Applications

- Power supply monitor for portable equipment such as electronic organizers, notebook PCs, cellular phones, digital cameras
- Constant voltage power monitor for cameras, communication equipment and video equipment
- Power monitor and reset for CPUs and microcomputers


#### Packages

SOT-23-5


SOT343

#### Pin Assignment

(SOT-23-5)





SOT343(SC82)




SOT-23-5 Pin No	SOT343 Pin No	SYMBOL	DESCRIPTION
1	4	OUT	VOLTAGE DETECTION PIN
2	2	VDD	VOLTAGE INPUT PIN
3	1	VSS	GROUND PIN
4	---	N.C	NO CONNECTION
5	3	CD	CONNECTION PIN DELAY CAPACITOR

### Block Diagrams

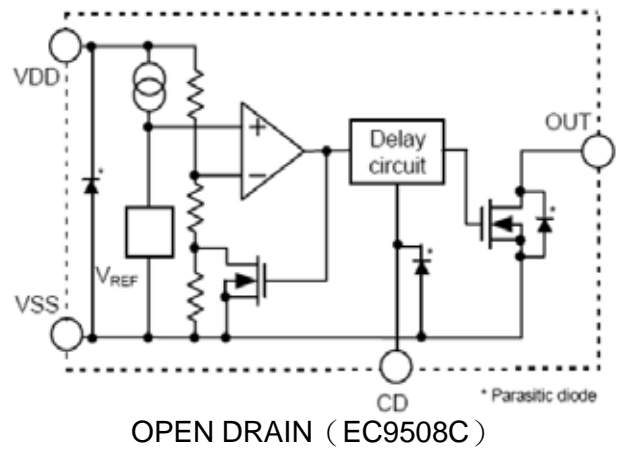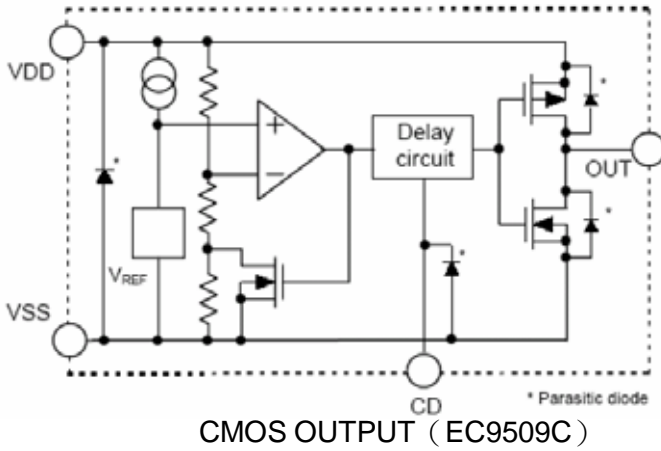


### Ordering Information

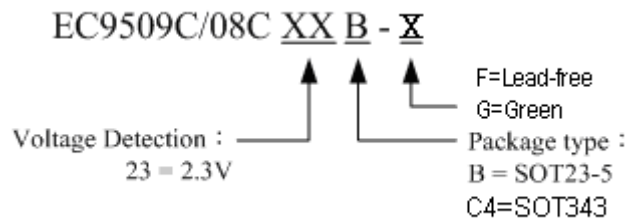

PART NUMBER	MARKING ID	PACKAGE	PACKING TYPE
EC9508C XXB-F	08CXXF	SOT23-5	TAPE / REEL
EC9508C XXB-G	08CXXG	SOT23-5	TAPE / REEL
EC9508CXXC4-G	XXYW	SOT343	TAPE/ REEL
EC9509C XXB-F	09CXXF	SOT23-5	TAPE / REEL
EC9509C XXB-G	09CXXG	SOT23-5	TAPE / REEL

### Package Marking Indication SOT-23-5 Marking

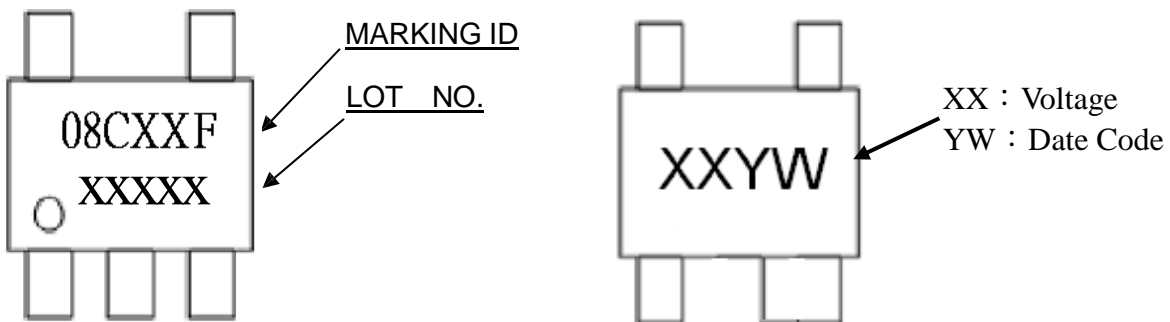



# BUILT-IN DELAY CIRCUIT HIGH-PRECISION VOLTAGE DETECTOR

**EC9509C/ 08C**

## Absolute Maximum Ratings

PARAMETER	SYMBOL	RATING	UNIT	
POWER SUPPLY VOLTAGE	$V_{DD} - V_{SS}$	8	V	
CD PIN INPUT VOLTAGE	$V_{CD}$	$V_{SS} - 0.3$ TO $V_{DD} + 0.3$	V	
OUTPUT VOLTAGE	$V_{OUT}$	$V_{SS} - 0.3$ TO $V_{DD} + 0.3$	V	
OUTPUT CURRENT	$I_{OUT}$	4	mA	
POWER DISSIPATION	$P_d$	SOT23 -5	500	mW
		SOT343	250	mW
OPERATING TEMPERATURE	$T_{OPR}$	-40 TO +85	°C	
STORAGE TEMPERATURE	$T_{STG}$	-40 TO +125	°C	
JUNCTION TEMPERATURE	$T_j(\max)$	150	°C	
JUNCTION TO AMBIENT THERMAL RESISTANCE	$\theta_{ja}$	347	°C/W	
JUNCTION TO CASE THERMAL RESISTANCE	$\theta_{jc}$	148	°C/W	


## Electrical Characteristics

CMOS output products

( $T_a = 25^\circ\text{C}$  unless otherwise specified)


Parameter	Symbol	Conditions	Min	Typ	Max	Unit	Test circuit
Detection voltage	$-V_{DET}$	--	$-V_{DET}(S)$ X 0.98	$-V_{DET}$	$-V_{DET}(S)$ X 1.02	V	1
Hysteresis width	$V_{HYS}$	--	$-V_{DET}$ X0.03	$-V_{DET}$ X0.05	$-V_{DET}$ X0.08	V	1
Current consumption	$I_{SS}$	$V_{DD} = 4V$	--	4.5	6.5	uA	2
Operating voltage	$V_{DD}$	--	2.0	--	6.0	V	1
Output Current of output transistor	$I_{OUT}$	N-channel $V_{DS} = 0.5V$ $V_{DD} = 2.4V$	2.88	4.98	--	mA	3
		P-channel $V_{DS} = V_{DD} - 0.5V$ $V_{DD} = 4.8V$	1.43	2.39	--	mA	5
Delay time	$t_d$	$CD = 4.7nF$ $V_{DD} = 3V$	6	13	20	ms	4

### Test circuit

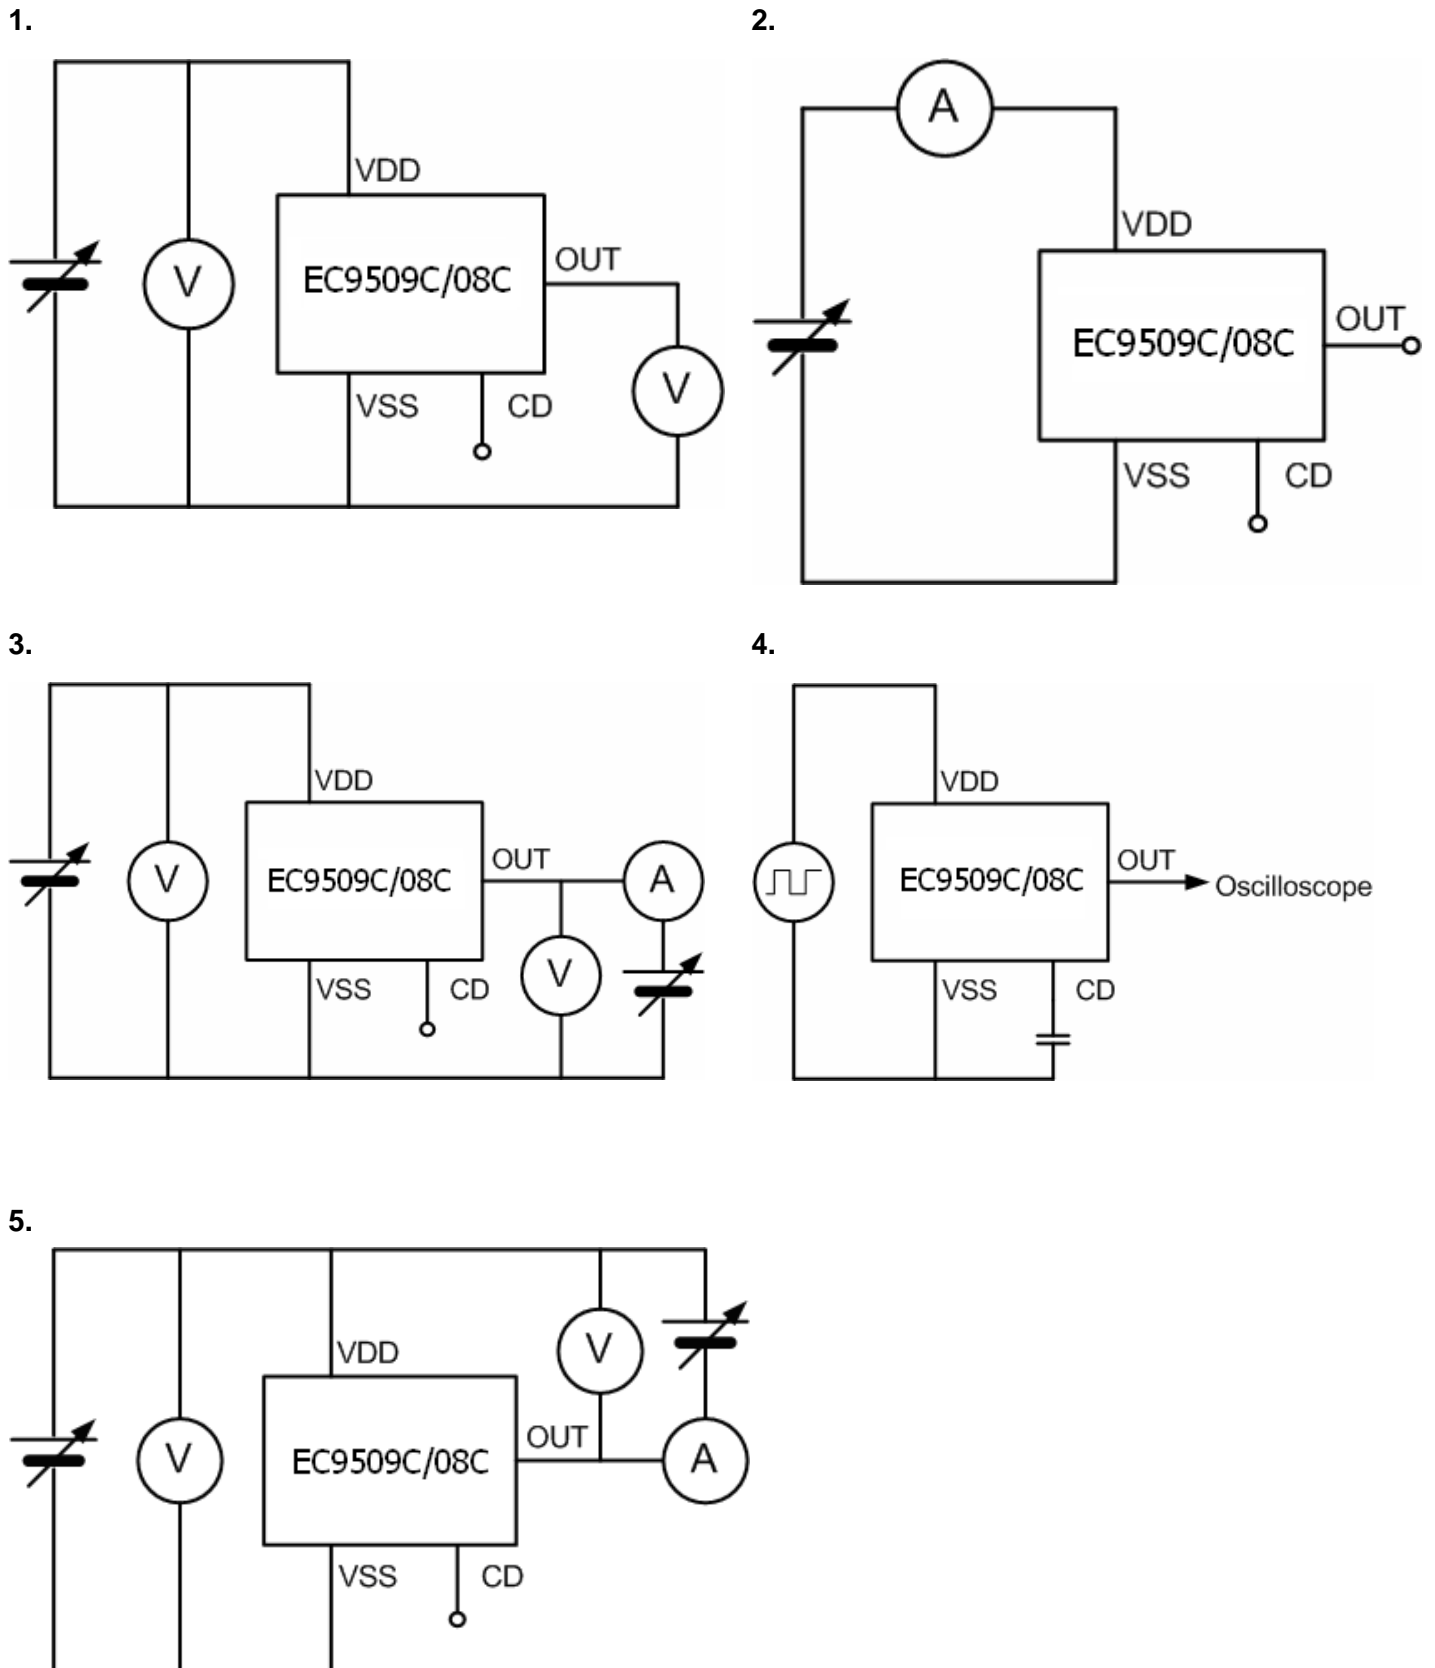


## Timing chart

### 1. CMOS active low output

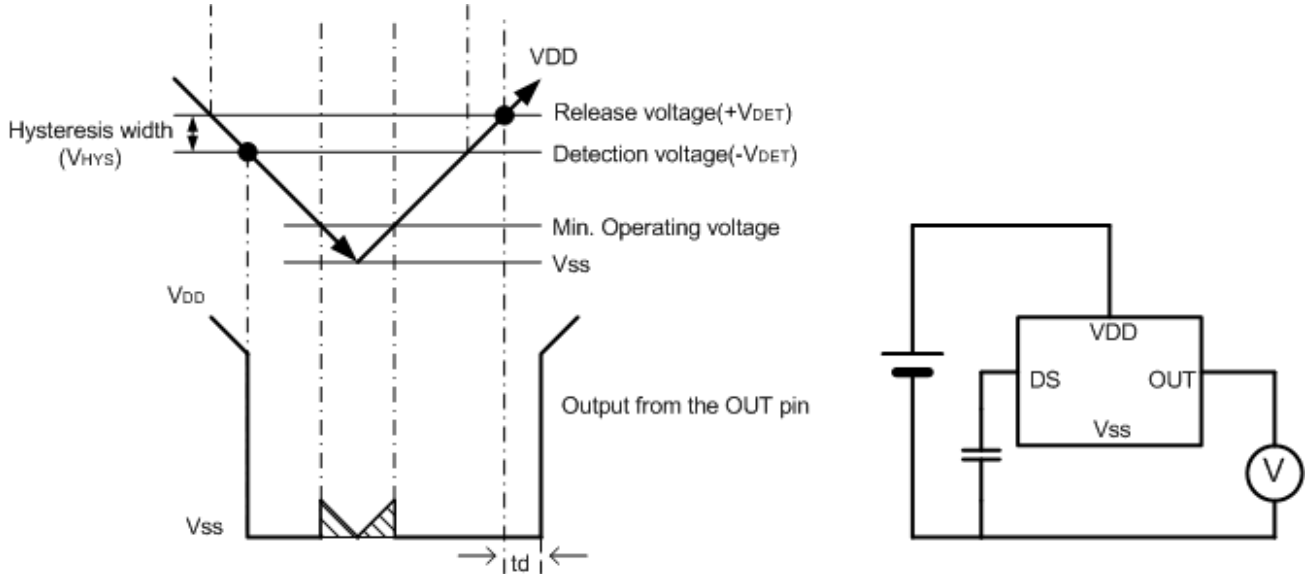

### 2. Nch open-drain active low output

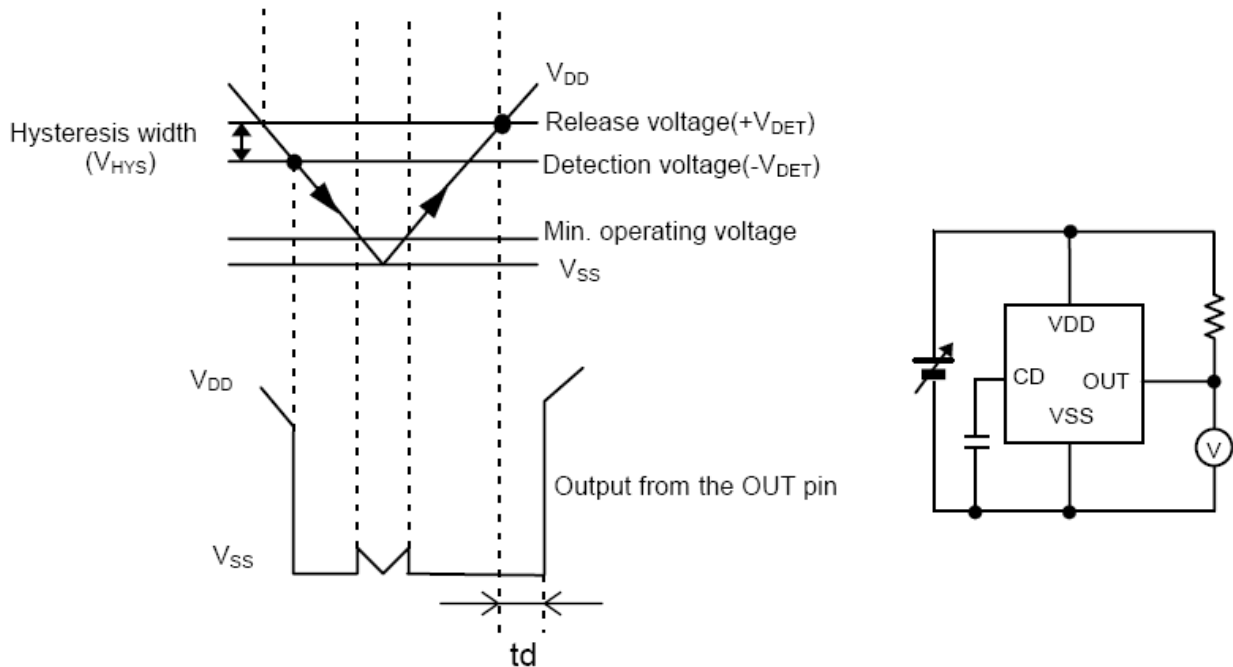

Note : For values of VDD less than minimum operating voltage, values of OUT terminal output is free of the shaded region.

## Definition of Technical Terms

### 1. Detection voltage ( $-V_{DET}$ )

Detection voltage  $-V_{DET}$  is a voltage at which the output turns to low. This detection voltage varies slightly among products of the same specification. The variation of detection voltage between the specified minimum [ $(-V_{DET})_{min.}$ ] and maximum [ $(-V_{DET})_{max.}$ ] is called the detection voltage range (See Figure A).

### 2. Release voltage ( $+V_{DET}$ )

Release voltage  $+V_{DET}$  is a voltage at which the output turns to high. This release voltage varies slightly among products of the same specification. The variation of release voltage between the specified minimum [ $(+V_{DET})_{min.}$ ] and maximum [ $(+V_{DET})_{max.}$ ] is called the release voltage range (See B).

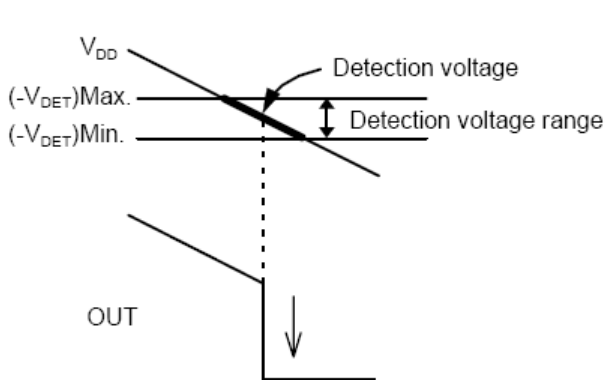


FIGURE A

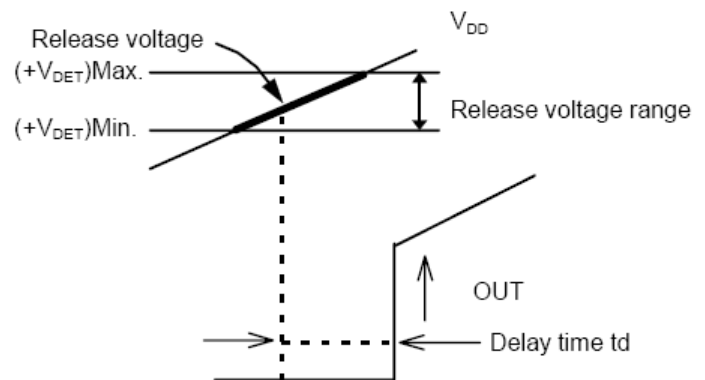



FIGURE B

### 3. Hysteresis width ( $V_{HYS}$ )

Hysteresis width is the voltage difference between the detection voltage and the release voltage. The existence of the hysteresis width avoids malfunction caused by noise on input signal.

### 4. Delay time ( $t_d$ )

Delay time is a time internally measured from the instant at which  $V_{DD}$  pin exceeds the release voltage ( $+V_{DET}$ ) to the point at which the output of the OUT pin inverts. The delay time changes according to the external capacitor  $C_D$ .

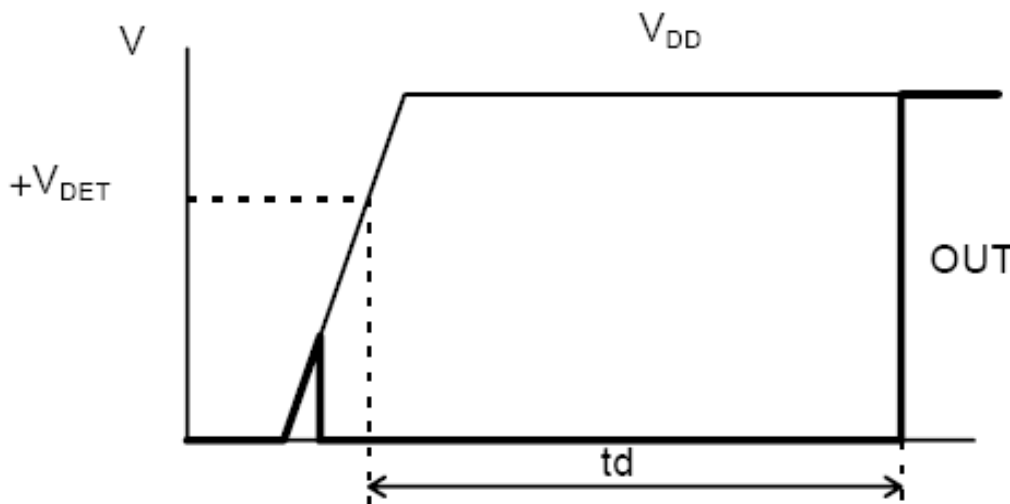

### 5. Short-circuit current


Short-circuit current refers to the current which flows instantaneously at the time of detection and release of a voltage detector. Short-circuit current is large in CMOS output products, and small in N channel open-drain output products.

### 6. Oscillation


In applications where a resistor is connected to the voltage detector input as shown in Figure , taking a CMOS active low product for example, the short-circuit current, which flows at release when the output goes from low to high, causes a voltage drop equal to [short-circuit current] × [input resistance] across the resistor. When the input voltage falls below the detection voltage -VDET as a result, the output voltage goes to low level. In this state, the short-circuit current stops and its resultant voltage drop disappears, and the output goes from low to high.

Short-circuit current again starts flowing, a voltage drop appears, and oscillation is finally induced by repeating the process.

Following is an example for bad implementation: input voltage divider for a CMOS output product.

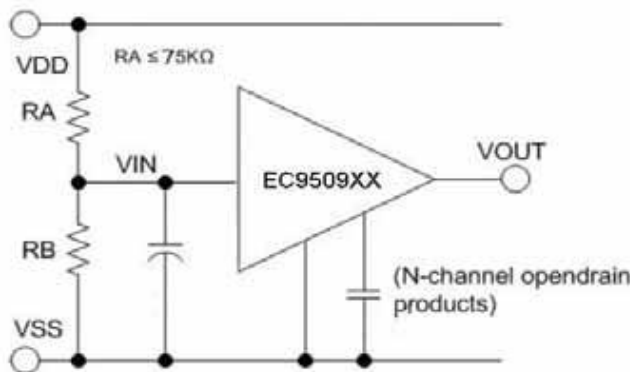

### Standard Circuit

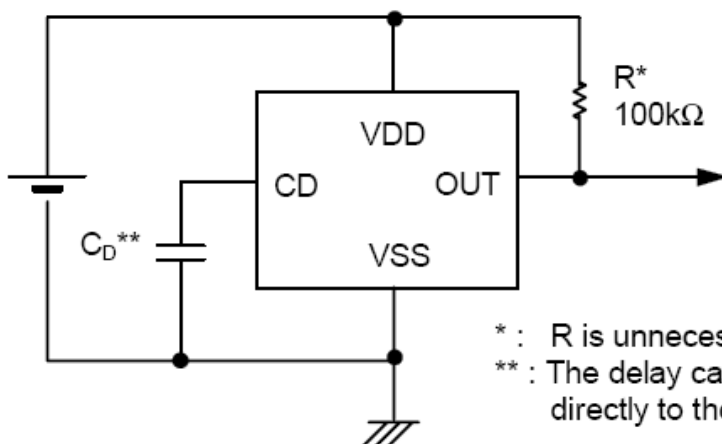


\* : R is unnecessary for CMOS output products.

\*\* : The delay capacitor  $C_D$  should be connected directly to the CD pin and to the VSS pin.


### Application Circuit Examples

#### 1. Microcomputer reset circuits

With the EC9509CXX Series which has a low operating voltage, a high-precision detection voltage and hysteresis characteristic, the reset circuits shown in Figures A to B can be easily constructed.

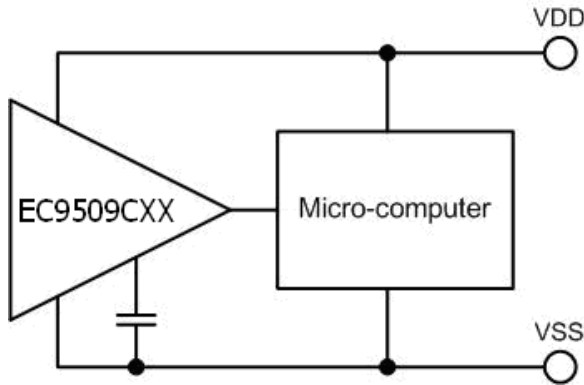

Figures A

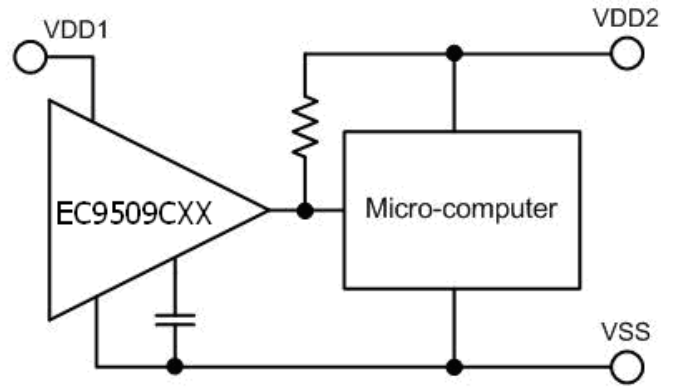


(Nch open-drain output products only)


Figures B

#### 2. Change of detection voltage

In Nch open-drain output products of the EC9508CXX Series, detection voltage can be changed using resistance dividers or diodes as shown in Figures C and D. Hysteresis width is also changed.

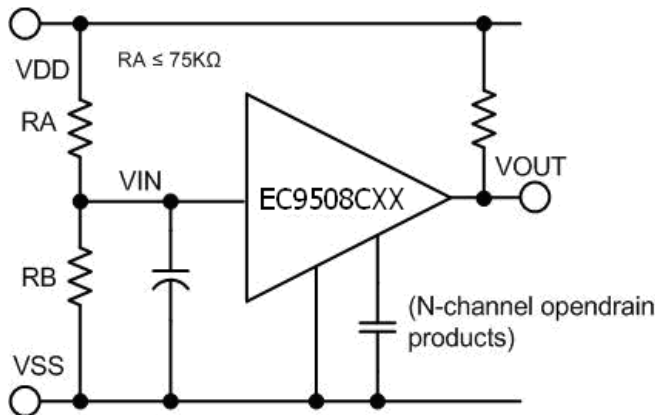

Figures C

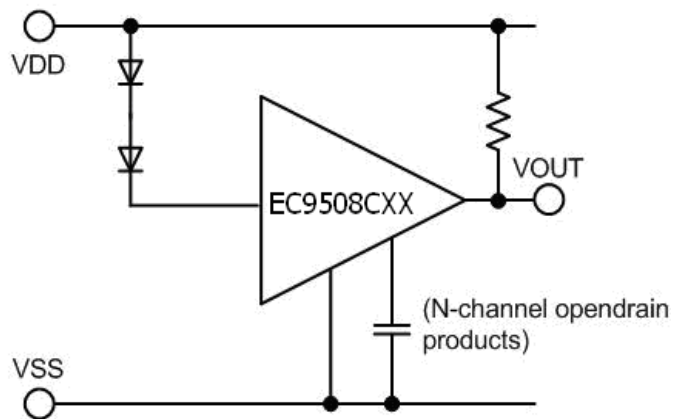

Figures D

$$\text{Detection Voltage} = \frac{RA + RB}{RB} - V_{DET}$$

$$\text{Hysteresis width} = \frac{RA + RB}{RB} - V_{HYS}$$

$$\text{Detection Voltage} = Vf1 + Vf2 + (-V_{DET})$$

Note1: If RA and RB are large, the hysteresis width may also be larger than the value given by the equation above due to short-circuit current (which flows slightly in an N channel open-drain product).


Note2: RA should be 75k Ω or less to prevent oscillation.



**PACKAGE TYPE : SOT23-5**

**● Dimensions**

Unit : mm

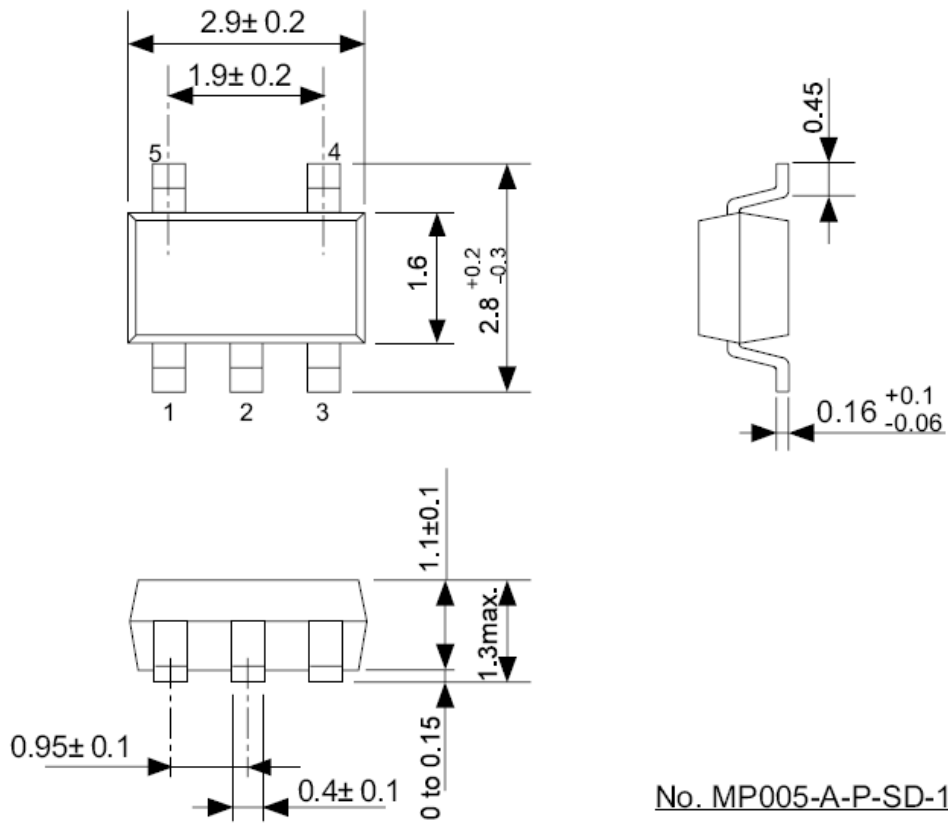


No. MP005-A-P-SD-1.1



# BUILT-IN DELAY CIRCUIT HIGH-PRECISION VOLTAGE DETECTOR

EC9509C/ 08C

## PACKAGE TYPE : SOT343

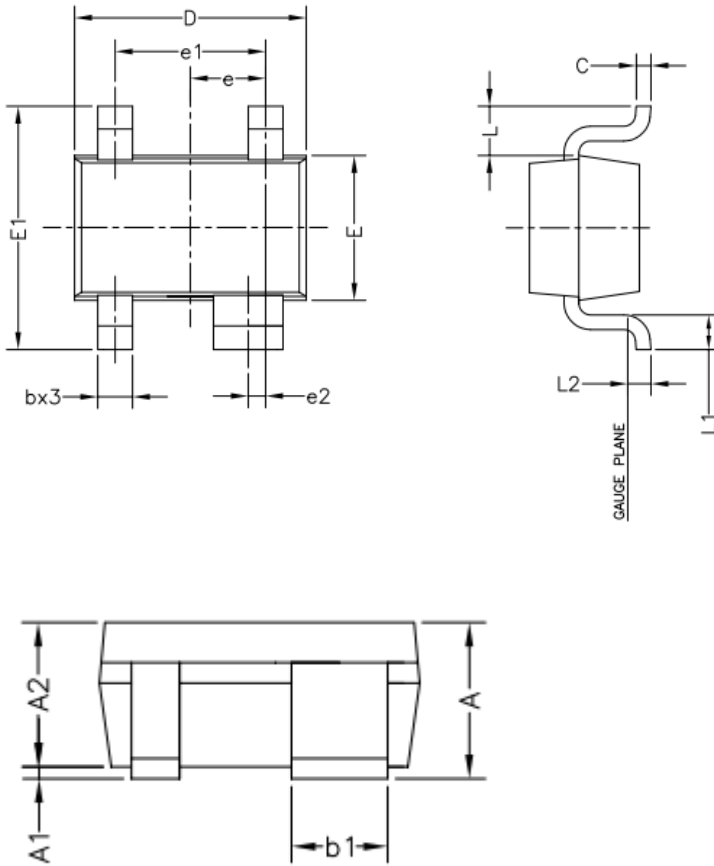

Symbol	Millimeters		Inches	
	MIN.	MAX.	MIN.	MAX.
A	0.90	1.10	.036	.044
A1	0.025	0.10	.001	.004
A2	0.875	1.00	.035	.040
b	0.20	0.40	.008	.016
b1	0.40	0.60	.015	.024
C	0.10	0.15	.004	.006
D	1.90	2.10	.076	.084
E	1.15	1.35	.046	.054
E1	2.00	2.30	.080	.091
e	0.65 BSC.		.026 BSC.	
e1	1.30 BSC.		.052 BSC.	
e2	0.15 BSC.		.006 BSC.	
L	0.425 REF.		.017 REF.	
L1	0.25	0.45	.010	.018
L2	0.200 REF.		.007 REF.	

**Note:**

1. All dimensions are in millimeters, and the dimensions in inches are for reference only.
2. 1mm=40mils=0.04inches