


Features

- Ideal for printed circuit board
- Reliable low cost construction utilizing molde plastic technique
- Moisture sensitivity: level 1, per J-STD-020
- Please package has Underwriters Laboratory Flammability Classification 94V-0
- Halogen-free according to IEC 61249-2-21 definition



Applications

For use of general purpose AC to DC bridge rectification in power Supply, charger, office appliance, home appliance and telecom device

Absolute Maximum Ratings							
Ratings at 25 °C, ambient temperature unless otherwise specified							
Parameter	Symbol	ABS22	ABS24	ABS26	ABS28	ABS210	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1000	V
Maximum Average Output Rectified Current	$I_{O(AV)}$	2.0					A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	I_{FSM}	50					A
Operating Junction and Storage Temperature Range	T_J , T_{STG}	- 55 to + 150					°C

Electrical Characteristics								
(T _A = 25 °C unless otherwise specified)								
Parameter	Test Conditions	Symbol	ABS22	ABS24	ABS26	ABS28	ABS210	Unit
Maximum Instantaneous Forward Voltage	I _F =1.0A	V _F	1.0				V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A =25°C T _A =125°C	I _R	5.0 100				μA	
Typical Junction Capacitance	4.0 V, 1 MHz	C _J	25				pF	

Thermal Characteristics							
Parameter	Symbol	ABS22	ABS24	ABS26	ABS28	ABS210	Unit
Typical Thermal Resistance ⁽¹⁾	R _{BJA}	60					°C/W
	R _{BJL}	16					

Notes: 1. Mounted on FR-4 P.C.B Board



Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

Fig.1 Average Rectified Output Current Derating Curve

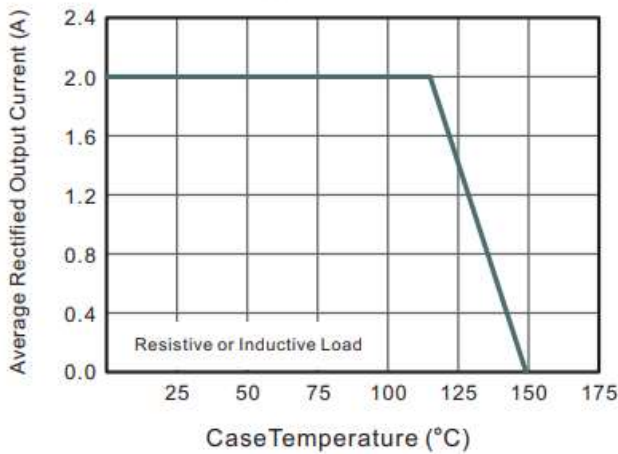


Fig.2 Typical Reverse Characteristics

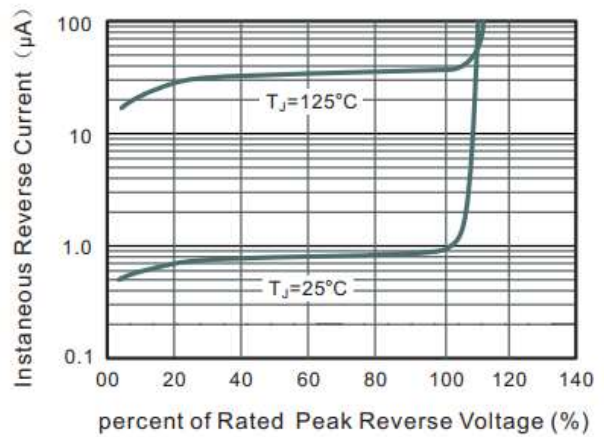


Fig.3 Typical Instantaneous Forward Characteristics



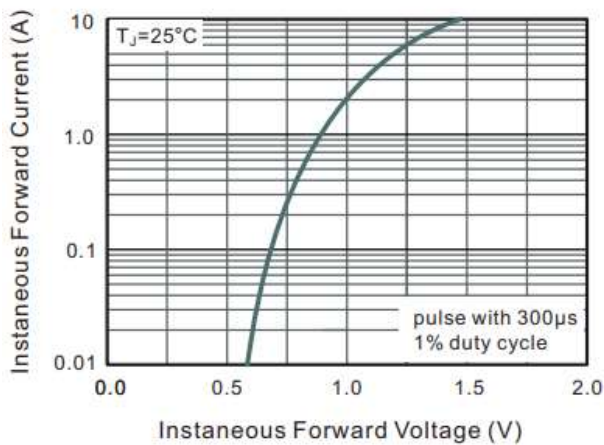


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

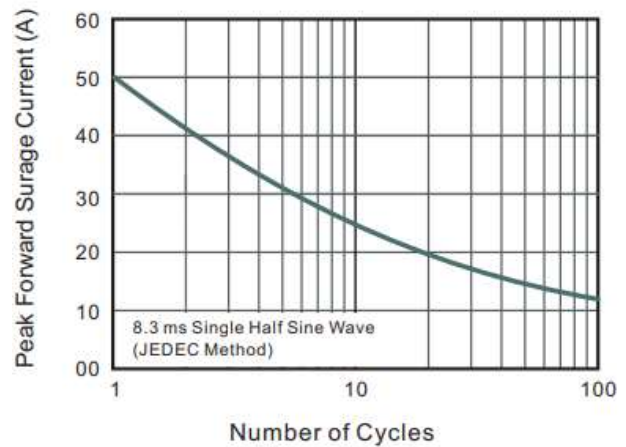

Package Dimensions

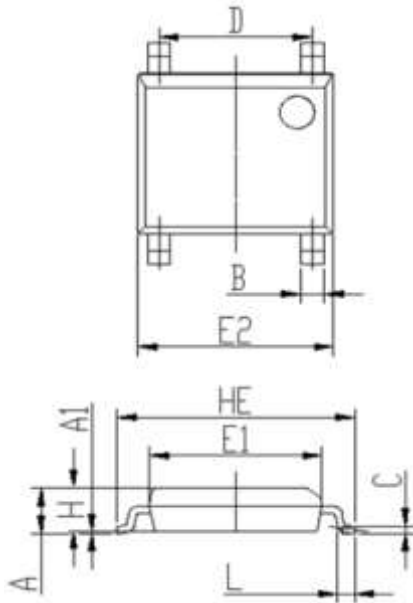

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
A	1.25	1.50	0.049	0.053
A1	0.00	0.15	0.000	0.006
B	0.50	0.70	0.020	0.028
C	0.15	0.30	0.006	0.012
D	3.80	4.20	0.150	0.165
E1	4.20	4.60	0.173	0.181
E2	4.90	5.20	0.197	0.205
L	0.25	0.65	0.010	0.026
HE	6.00	6.40	0.236	0.252
H	1.20	1.30	0.047	0.051

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
ABS22 Thur ABS210	ABS	Tape and reel	4000pcs / reel	EIA STD RS-481