

General Description

The ELN9703 is a low voltage, high performance single N-MOSFET power switch, designed for power rail on/off control with low RDS(ON)≈70mΩ and full protection functions. The ELN9703 equipped with a charge pump circuitry to drive the internal MOSFET switch and a flag output is available to indicate fault conditions against large di/dt which may cause the supply to fall out of regulation. In order to fit different application, an ISET pin is offered for current limit point setting, a resistor from ISET to ground sets the current limit for the switch. Additional features include soft-start to limit inrush current during plug-in, thermal shutdown to prevent catastrophic switch failure from high-current loads, Output anti back irrigation Protection whether EN pin is connected GND or VIN, under-voltage lockout (UVLO) to ensure that the device remains off unless there is a valid input voltage present, a precision resistor-programmable output current limit up to 3.5A. Besides, the lower quiescent current as 40μA making this device ideal for portable battery-operated equipment. The ELN9703 is available in SOT23-5 or SOP-8 package requiring minimum board space and smallest components.

Features


- Adjustable Current Limiting up to 3.5A
- Built-In (Typically 70mΩ) N-MOSFET
- Reverse Current Flow Blocking (no body diode)
- Output Can Be Forced Higher than Input (Off or On State)
- Low Supply Current :
 - 40μA Typical at Switch on State
 - Less than 1μA Typical at Switch Off State
- Guaranteed Continuous Load Current
 - ELN9703MR (SOT23-5) : 2.1A
 - ELN9703SR (SOP-8) : 3A
- Wide Input Voltage Ranges : 2V to 5.5V
- Open-Drain Fault Flag Output
- Hot Plug-In Application (Soft-Start)
- 1.7V Typical Under-Voltage Lockout (UVLO)
- Thermal Shutdown Protection
- Smallest SOT23-5 and SOP-8 Package
- RoHS Compliant and 100% Lead (Pb)-Free

Applications


- USB 3G Data card
- USB Dongle
- Mini PCI Accessories
- LCD Monitor, LCD-TV
- USB Power Module for ADSL
- Information Appliance and Set-Top Box
- Battery-Powered Equipment
- Hot-Plug Power Supplies
- ACPI Power Distribution
- PCI Bus Power Switching
- Motherboard & Notebook PCs
- PC Card Hot Swap Application

Pin and Marking

ELN9703MR

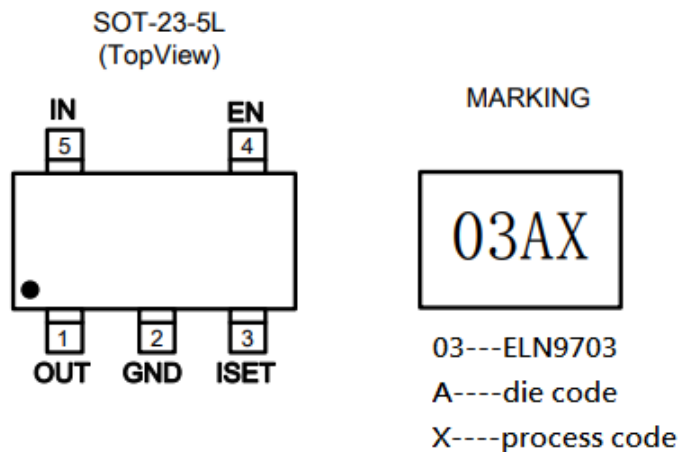


ELN9703SR

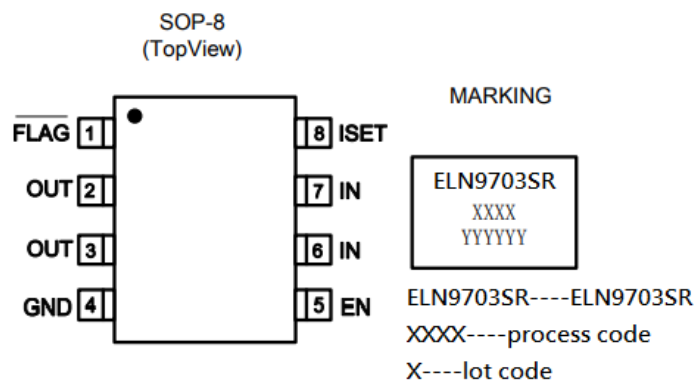


Typical Application Circuit

Circuit 1:

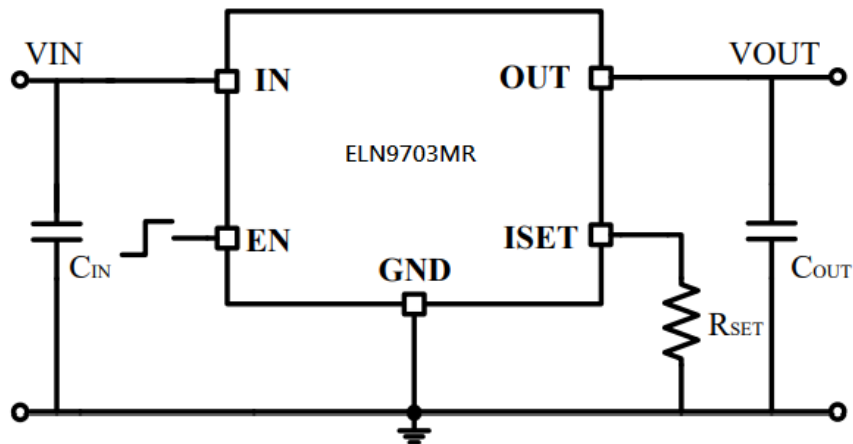

Circuit 2:

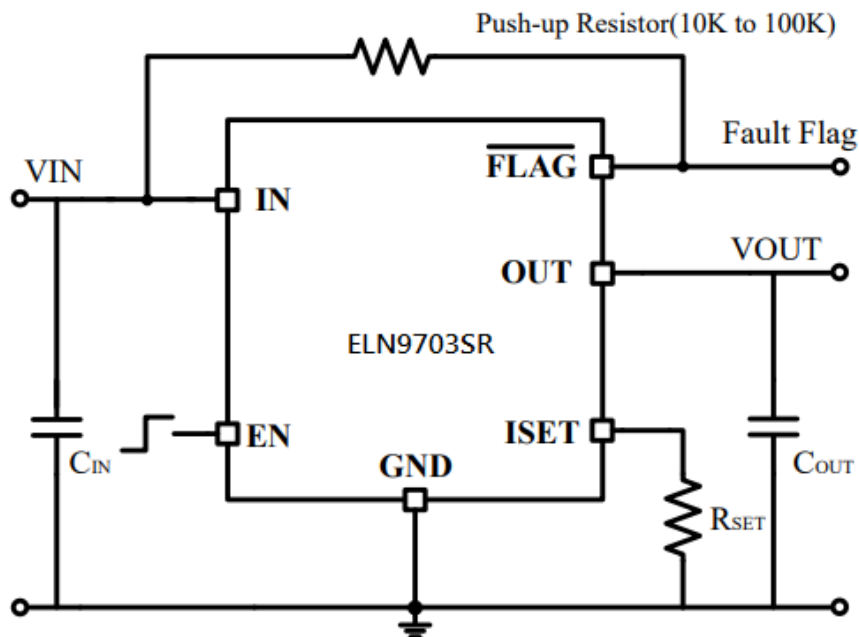

Note: Current limit: $I_{LIMIT} = 270K/R_{SET}$.

Functional Pin Description

Pin Name	Pin Function
IN	Power Input Voltage.
OUT	Output Voltage.
GND	Ground.
EN	Chip Enable (Active High).
ISET	Current Limit Programming Input.
FLAG	Open-Drain Fault Flag Output.

Absolute Maximum Ratings

● Supply Voltage	-----	6.5V
● Chip Enable Input Voltage	-----	-0.3V to 6.5V
● Flag Voltage	-----	6.5V
● Power Dissipation, PD @ TA = 25°C		
SOT23-5	-----	0.6W
SOP-8	-----	0.95W
● Package Thermal Resistance		
SOT23-5	-----	200°C/W
SOP-8, θJA	-----	104°C/W
● Junction Temperature	-----	125°C
● Lead Temperature (Soldering, 10 sec.)	-----	260°C
● Storage Temperature Range	-----	-65°C to 150°C
● ESD Susceptibility (Note 2)		
HBM (Human Body Mode)	-----	8kV
MM (Machine Mode)	-----	800V


Electrical Characteristics

(VS = +5V, VCM = +2.5V, VO = +2.5V, TA = +25°C, unless otherwise noted.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
R _{DS(ON)}	Switch On Resistance	I _{OUT} = 1A		70	80	mΩ
I _{SW_ON}	Supply Current	Switch On, V _{OUT} = Open		40	50	μA
I _{SW_OFF}	Shutdown Current	Switch Off, V _{OUT} = Open		0.1	1	μA
V _{IL}	CE Threshold Logic-Low Voltage	Switch Off			0.8	V
V _{IH}	CE Threshold Logic-High Voltage	Switch On	2.0			V
I _{CE}	CE Input Current	V _{CE} = 0V to 5.5V		10		pA
I _{LEAKAGE}	Output Leakage Current	V _{CE} = 0V, R _{LOAD} = 0Ω		0.5		μA
T _{ON_RISE}	Output Turn-On Rise Time	10% to 90% of V _{OUT} rising		1.5		ms
	Current Limit Factor	I _{LIM} × R _{SET}		270k		A·Ω
I _{LIMSET}	Max. Current Limit Setting	V _{IN} = 3.3V to 5.5V, R _{SET} = 75kΩ			3.5	A
ΔI _{LIMSET}	Current Limit Setting Accuracy	I _{LIMSET} = 0.5A to 3A (R _{SET} = 540kΩ to 90kΩ)	-20		+20	%
R _{FLG}	FLAG Output Resistance	I _{SINK} = 1mA		15	400	Ω
I _{FLG_OFF}	FLAG Off Current	V _{FLG} = 5V		10		nA
t _D	FLAG Delay Time	Form fault condition to FLAG assertion	2	4.6	8	ms
V _{UVLO}	Under-Voltage Lockout	V _{IN} increasing	1.3	1.7		V
ΔV _{UVLO}	Under-Voltage Hysteresis	V _{IN} decreasing		0.1		V
T _{SD}	Thermal Shutdown Protection			120		°C
ΔT _{SD}	Thermal Shutdown Hysteresis			30		°C

Package Information

SOT-23-5L

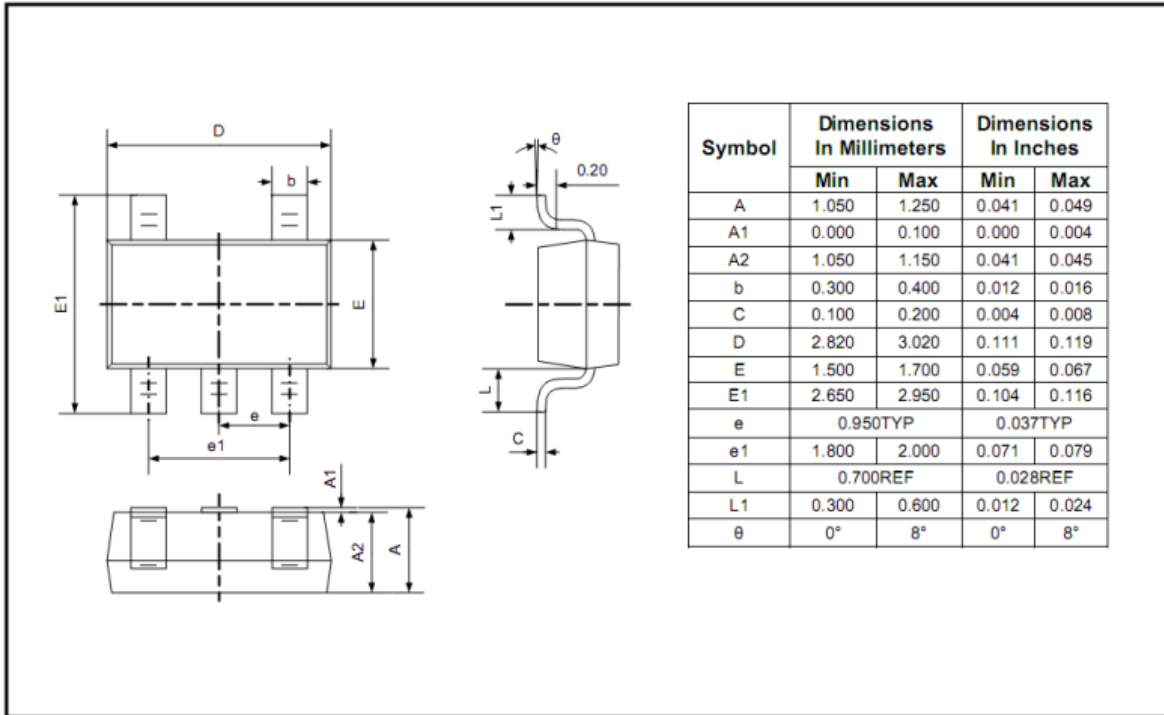

SOP8

