

Descriptions

EC86XX series is designed for power sensitive applications. It includes a precision and high voltage input stage, an ultracurrent branch, and results in a ultra and low-dropout linear regulator. The EC86XX operates from an input voltage of VOUT+1V to 65V, consumes only quiescent current, and offers 1% initial accuracy and low dropout voltage, 70mV typical at 10mA. EC86XX is a fixed output LDO with available has available voltages at 3.3V and 5.0V. Although designed primarily as fixed voltage regulators, the device can be used with external resistors to obtain variable output voltages. typical such application circuit, along with the needed calculations for accurate output voltages, are attached on the following page. Other features include short-circuit protection and thermal shutdown.


Feature

- ◆Ultra Low Quiescent Current: 1.8uA(Typ.)
- ◆Wide Operating Voltage: VOUT+1V to 65V (max Vin can be up to 80V)
- ◆High output current: $\geq 200\text{mA}$
- ◆System startup with no overshoot
- ◆Short circuit protection is designed with no overshoot
- ◆Low Dropout Voltages:
 - 70mV@10mA
 - 700mV@100mA
- ◆High Accuracy Output Voltage: $\pm 2\%$
 - Accuracy can be 1% for special orders
- ◆Excellent power / load transient response
- ◆Low temperature coefficient: $\pm 100\text{ppm}/^\circ\text{C}$
- ◆Thermal and Short-Circuit Protection
- ◆With EN pin
- ◆Available Packages : SOT23-3, SOT23-5, SOT89, EMSOP8, SOP8, TO252


Application

- ◆Battery-powered equipment
- ◆Smoke detector and sensor
- ◆Microcontroller Applications
- ◆Smart electric meter

Typical Application

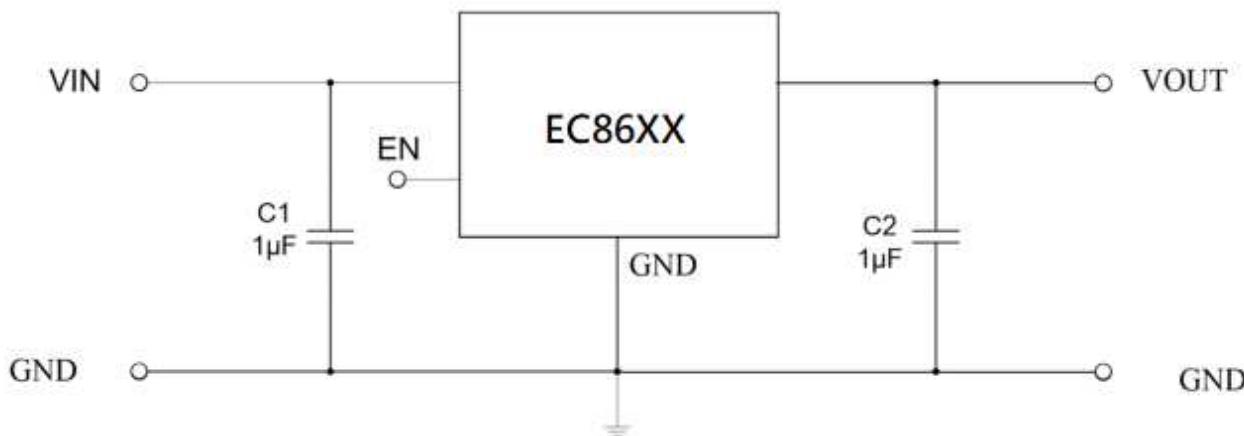


Pin Configuration

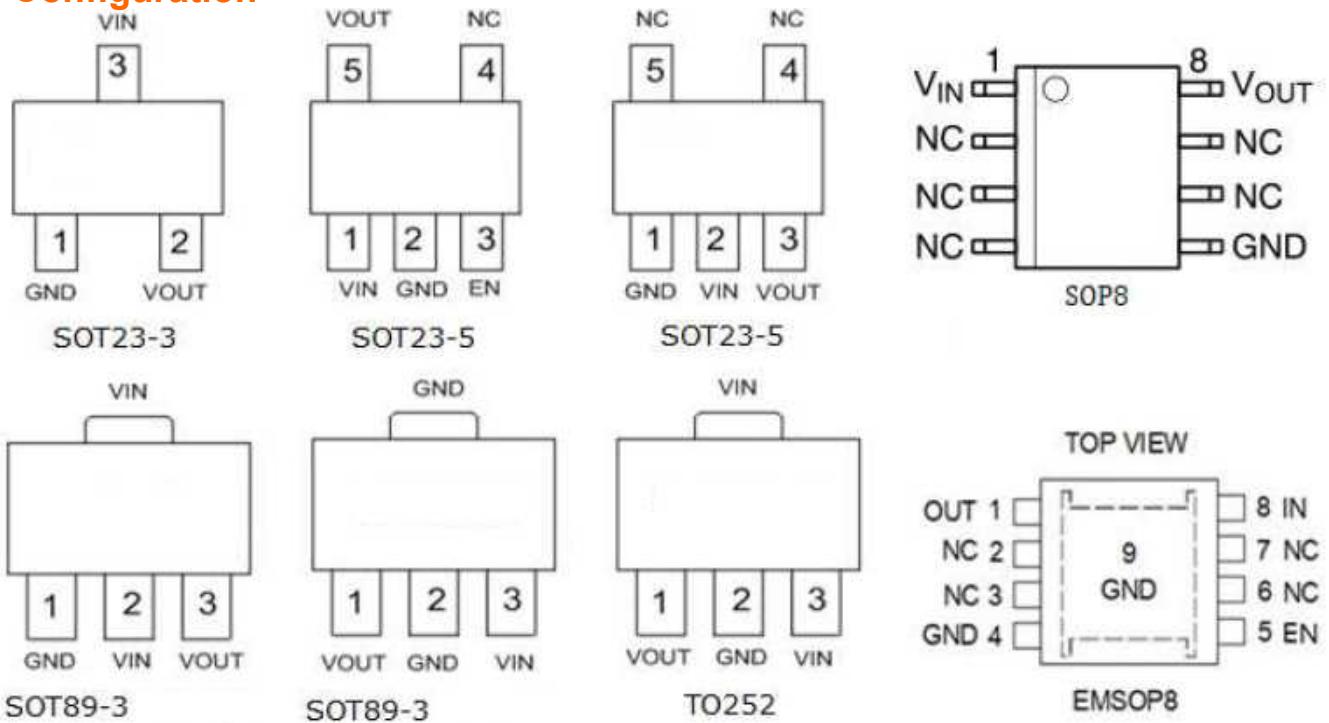


Pin Description

Pin Name	Pin Function Description
VIN	Input pin
VOUT	Output pin
GND	Ground pin
EN	Enable pin
NC	No connection

Functional Block Diagram

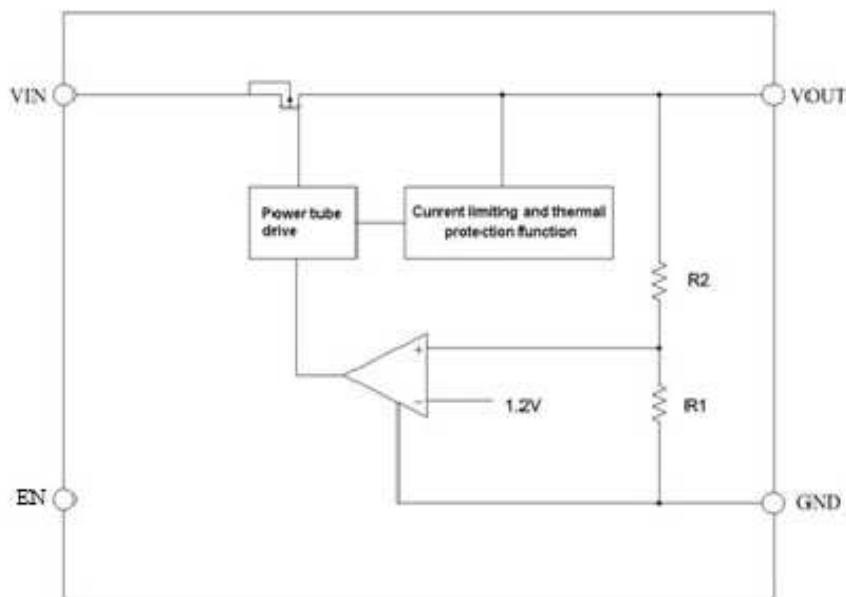

Ordering Information

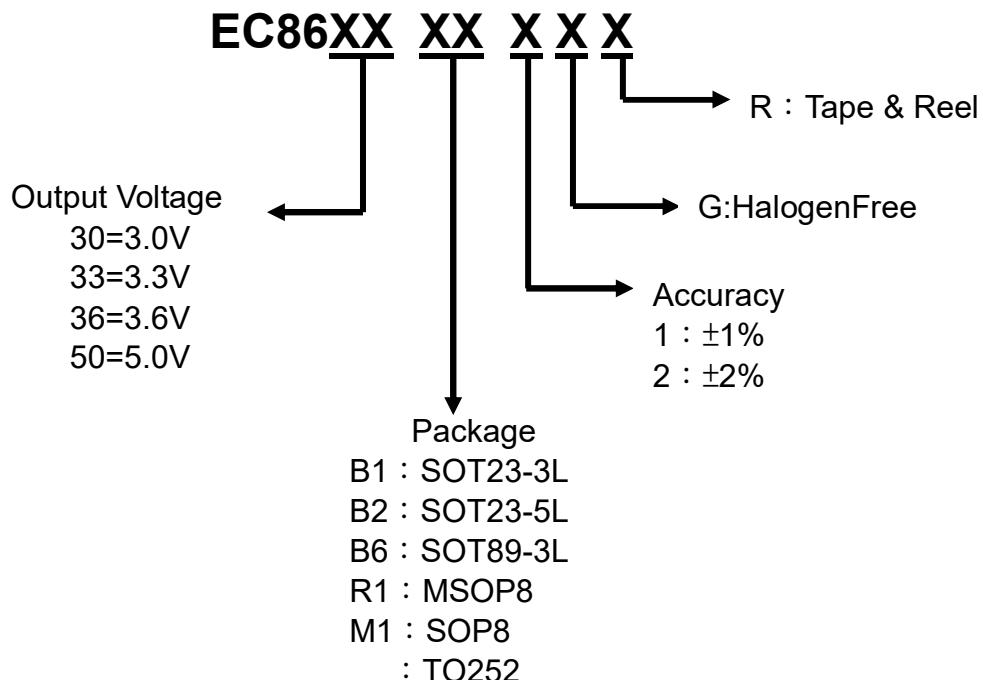

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
V_{IN}	Input Supply Voltage	80	V
EN	Enable Voltage	80	
$V_{OUT} - GND$	Output Voltage TO GND	6	
$V_{out} - VIN$	Output Voltage TO VIN	-75	
T_A	Operating Temperature	-40----105	
T_{STG}	Storage Temperature	-40---150	$^{\circ}C$
T_J	Maximum Junction Temperature	150	
T_{LEAD}	Lead Temperature (Soldering) 10 seconds	260	
θ_{JA}	Thermal Resistance, Junction-to-Ambient	165(SOT89)	$^{\circ}C/W$
		280(SOT23-3)	
		270(SOT23-5)	
		180(SOP8)	
		85(TO252)	
P_D	Power Consumption	750(SOT89)	mW
		446(SOT23-3)	
		465(SOT23-5)	
		700(SOP8)	
		1300(TO252)	
Electrostatic discharge rating	Human Body Model (HBM)	4	kV
	Charged Device Model (MM)	100	V

Note : Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.



Recommended Operating Conditions

Symbol	Parameter	Maximum	Units
V _{IN}	Input Supply Voltage	60	V
T _A	Operating Temperature	-20----85	°C
T _{LEAD}	Lead Temperature (Soldering) 10 seconds	230	°C

Electrical Characteristics


(TA=25°C, CIN=1uF, VIN=VOUT+1.0V, COUT=10μF, unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{IN}	Input Supply Voltage		2.8		60	V
V _{OUT}	Output Voltage Accuracy	I _{OUT} =10mA	-1%		1%	V
			-2%		2%	V
I _Q	Quiescent Current	V _{IN} =6V~60V		1.8	4	μA
I _{OUT}	Output Current			200		mA
V _{DROP}	Dropout Voltage	I _{OUT} =10mA ΔV _{OUT} = - V _{OUT} *2%		70		mV
		I _{OUT} =100mA ΔV _{OUT} = - V _{OUT} *2%		700		mV
V _{LR}	Load Regulation	1mA ≤ I _{OUT} ≤ 100mA		20		mV
V _{SR}	Line Regulation	I _{OUT} =1mA, V _{IN} =(V _{OUT} +1V) to 30V		0.2		%/V
PSRR	Power Supply Rejection Ratio	Vin=12V , Iout=10mA F=1Khz,Vout=3.3V	—	70	—	dB
V _{ENH}	Enable High Level	Enabled	1	—	—	V
V _{ENL}	Enable Low Level	Disabled		—	0.4	V
I _{EN}	EN Current	EN=0~V _{IN} (R _{EN} =100K)		1		μA
I _{LIMIT}	Current Limit	V _{IN} =(V _{OUT} +1V) to 60V		400		mA
T _{SHDN}	Thermal Protection			150		°C
TC _{VOUT}	Output Voltage Temperature Coefficient	I _{OUT} =10mA -40°C≤T _{AMB} ≤100°C		-17		ppm/°C


Typical Performance Characteristics

(TA=25°C, CIN=1uF, VIN=VOUT (3.3V) +1.0V, COUT=10μF, unless otherwise noted)


Output Voltage vs Temperature

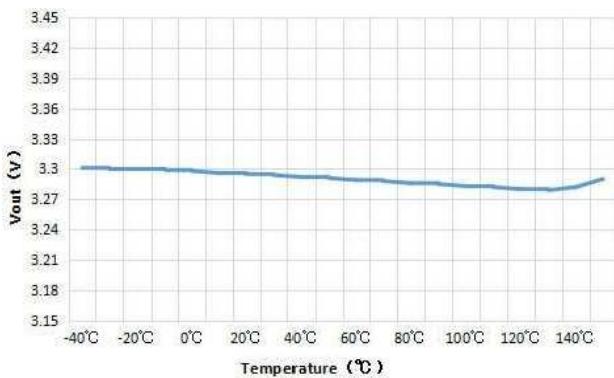


Quiescent current vs Input Voltage

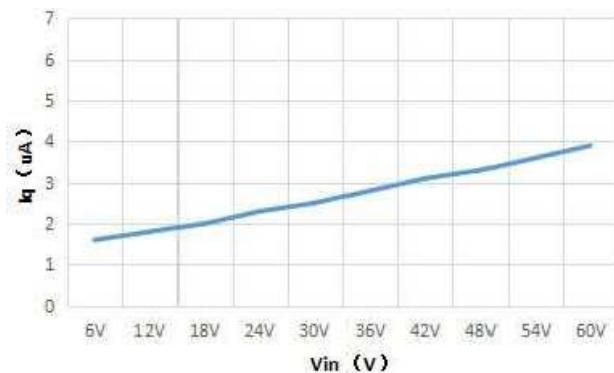


Load Regulation (Vin=30V)

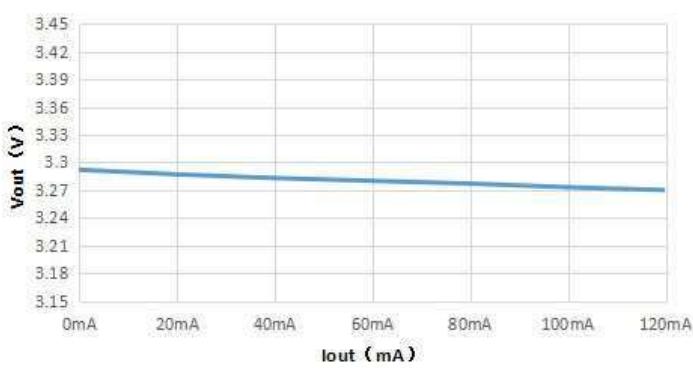


Line Regulation

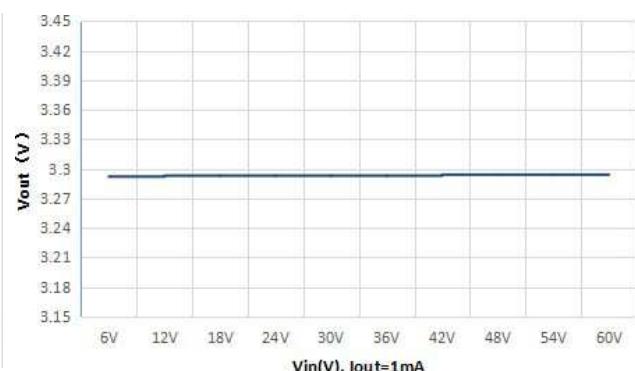


Power-Supply Rejection Ratio vs. Frequency

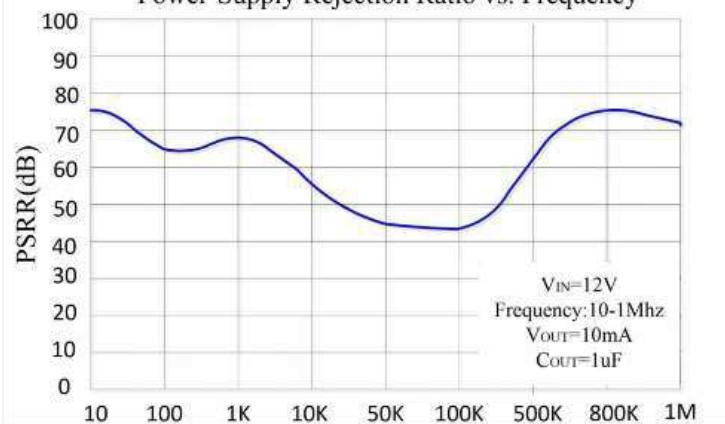



Load Transient (Vin=12V) 10mA~100mA

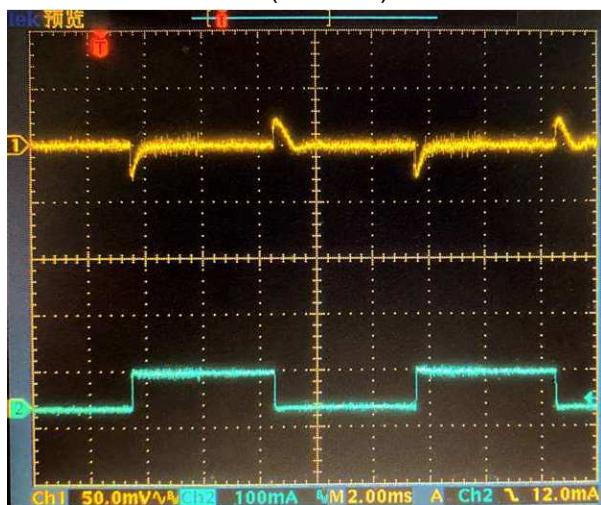


Short-Circuit and OTP (Vin=24V)

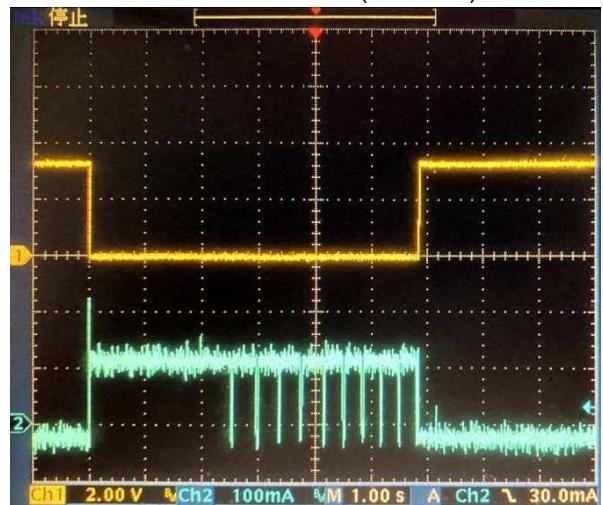

EN OFF→ON

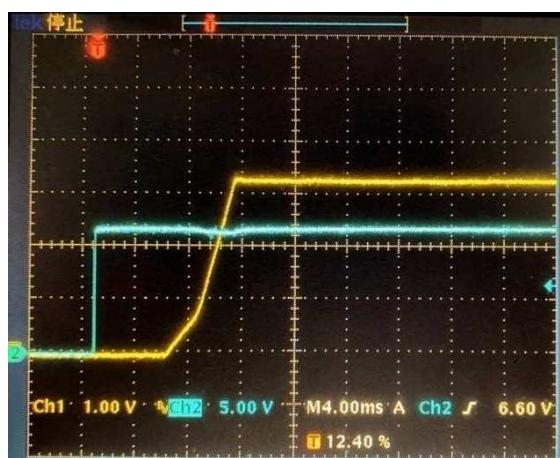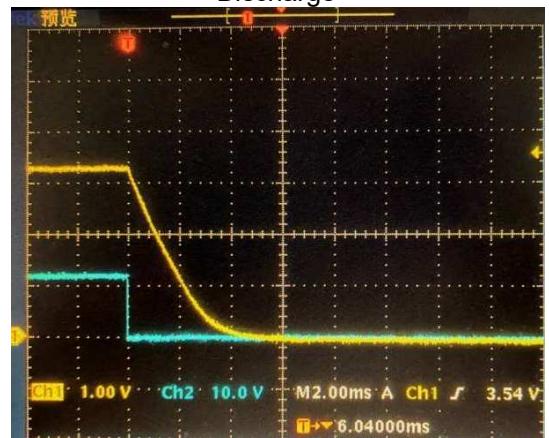
 EN ON→OFF (No Load)
Discharge


VCC Power ON

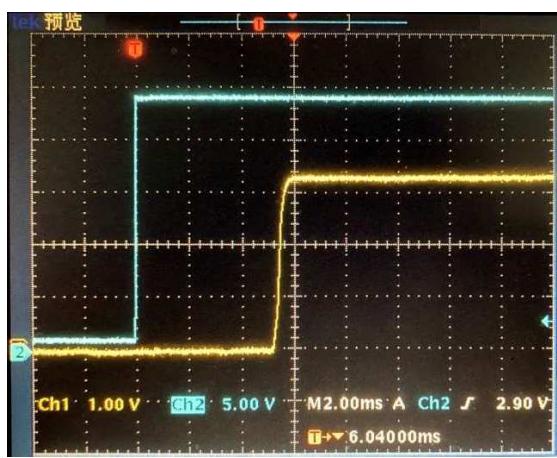

Application Information

INPUT CAPACITOR

An input ceramic capacitor of $1\mu F$ is required between the VIN and GND pin. The capacitor shall be placed as close as possible to VIN pin, and the wide copper trace is also recommended.

OUTPUT CAPACITOR

The recommended is $10\mu F$ ceramic capacitor. The minimum capacitance for stable and correct operation is $1\mu F$. The higher the value of this output capacitor, the lower the ripple during the operations. The output capacitor should be placed as close to the Output Pin as possible. The wide copper trace is recommended.

NO-LOAD STABILITY

The EC86XX will remain stable and in regulation with no external load.

FOLD-BACK SHORT-CIRCUIT PROTECTION


When short-circuit occurs, EC86XX will fold back the short-circuit currents to a pre-determined lower level. This will reduce excessive heat in otherwise large current conditions. This feature provides another level of protection to IC itself and also the whole system.

EN Functions

EN is Hi-Z internally. EN must be connected to either to Vcc (through a resistor) or GND externally, if SOT23-5 package is used. If left floating, the Vout is unknown

IN-RUSH CURRENT AND VOLTAGE


The following figure shows a typical application circuit for the EC86XX devices. Please keep in mind that in-rush current can push up the Vin overshoot by as much as 50%. For example, when $Vin=50V$, the in-rush caused spike voltage can be as high as $75V$. Therefore the voltage rating of C_{in} needs to be higher than 50% of the application.

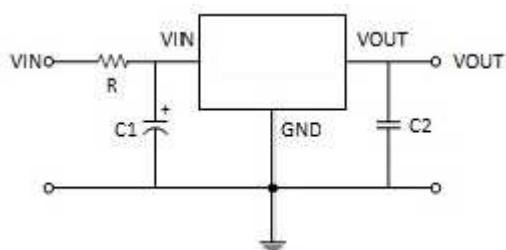

In live insertion application, it is suggested that R , C_1 are selected as following:


1. $C_1=10\mu F \sim 100\mu F$ ceramic or electrolytic capacitor with maximum voltage greater than $80V$, $R=0$
2. If the average current is known, for example at $10mA$, then for an input voltage of $55V$, the $C_1=1\mu F \sim 10\mu F$ ceramic or electrolytic with maximum voltage greater than $80V$ and $R=2K\Omega$ in the type of 1206 at $1/4W$ rating can be selected.

Outline Drawing for SOT-23-3

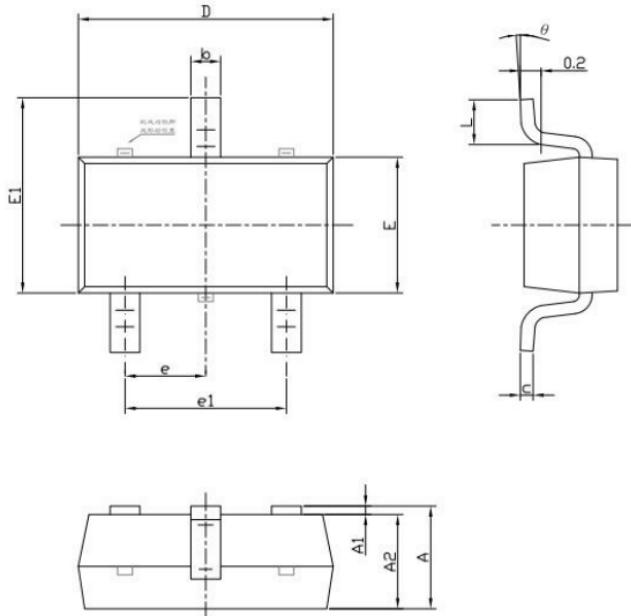


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Outline Drawing for SOT-23-5

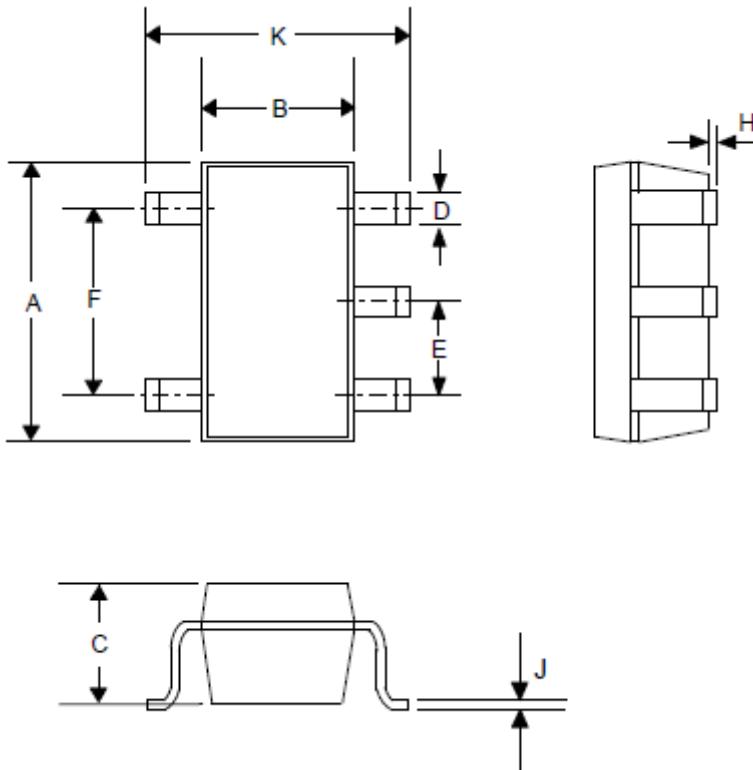


DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.110	0.120	2.80	3.05
B	0.059	0.070	1.50	1.75
C	0.036	0.051	0.90	1.30
D	0.014	0.020	0.35	0.50
E	-	0.037	-	0.95
F	-	0.075	-	1.90
H	-	0.006	-	0.15
J	0.0035	0.008	0.090	0.20
K	0.102	0.118	2.60	3.00

Outline Drawing for SOT-89

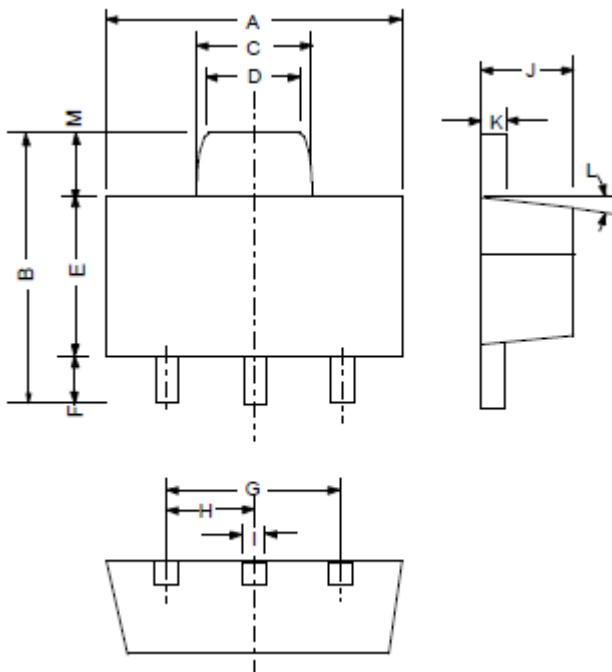


DIM ENSIO NS				
DIM N	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.173	0.181	4.400	4.600
B	0.159	0.167	4.050	4.250
C	0.067	0.075	1.700	1.900
D	0.051	0.059	1.300	1.500
E	0.094	0.102	2.400	2.600
F	0.035	0.047	0.890	1.200
G	0.118REF		3.00 REF	
H	0.059REF		1.50 REF	
I	0.016	0.020	0.400	0.520
J	0.055	0.063	1.400	1.600
K	0.014	0.016	0.350	0.410
L	10 °TYP		10 °TYP	
M	0.028REF		0.70 REF	

Outline Drawing for EMSOP8

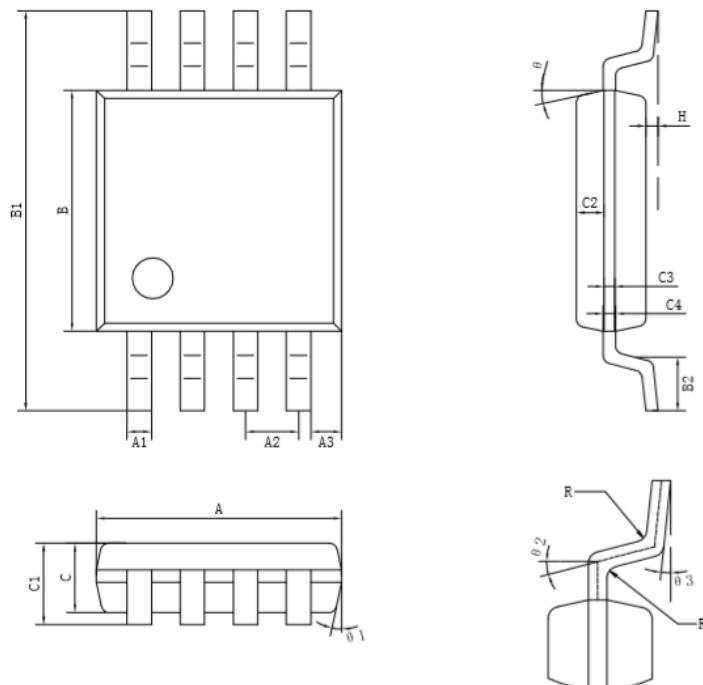


尺寸 标注	最小(mm)	最大(mm)	尺寸 标注	最小(mm)	最大(mm)
A	2.90	3.10	C3		0.152
A1	0.30TYP		C4	0.172	
A2	0.65TYP		H	0.02	0.15
A3	0.375TYP		ø	12° TYP4	
B	2.90	3.10	ø1	12° TYP4	
B1	4.70	5.10	ø2	14° TYP	
B2	0.50	0.70	ø3	0° ~ 6°	
C	0.76	0.96	R	0.15TYP	
C1	--	1.10	R1	0.15TYP	
C2	0.37				

Outline Drawing for SOT8

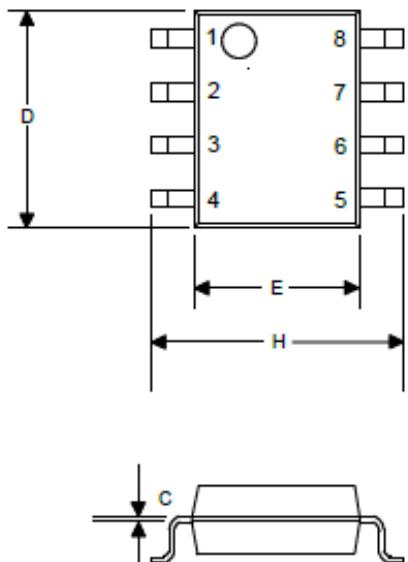

DIMENSIONS				
DIM ^N	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.0532	0.0688	1.35	1.75
A1	0.0040	0.0098	0.10	0.25
B	0.0130	0.0200	0.33	0.51
B1	0.050	BSC	1.27	BSC
C	0.0075	0.0098	0.19	0.25
D	0.1890	0.1968	4.80	5.00
H	0.2284	0.2440	5.80	6.20
E	0.1497	0.1574	3.80	4.00

Outline Drawing for TO252

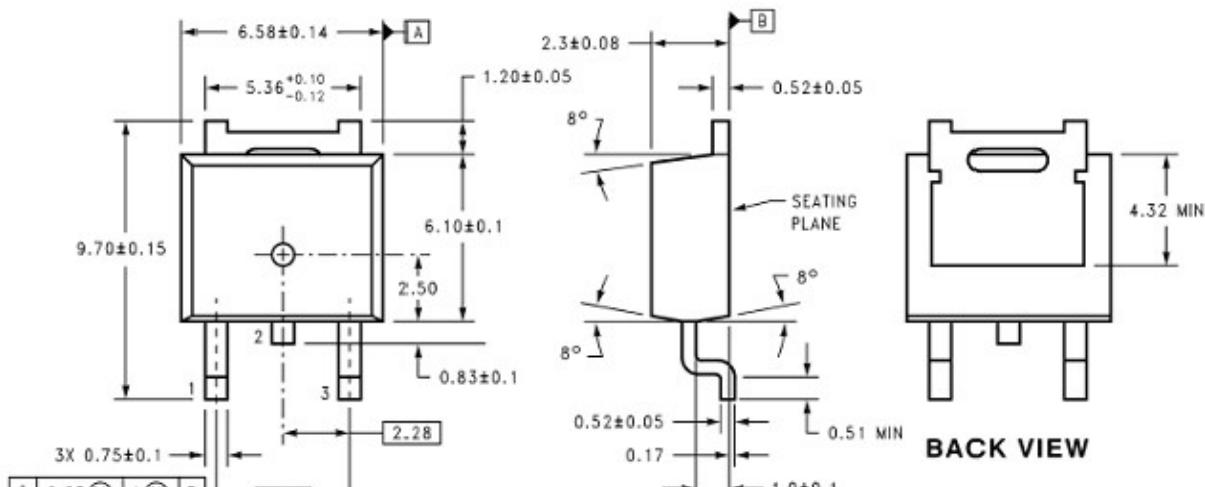

DIMENSIONS ARE IN MILLIMETERS

3-Lead TO-252 Package